
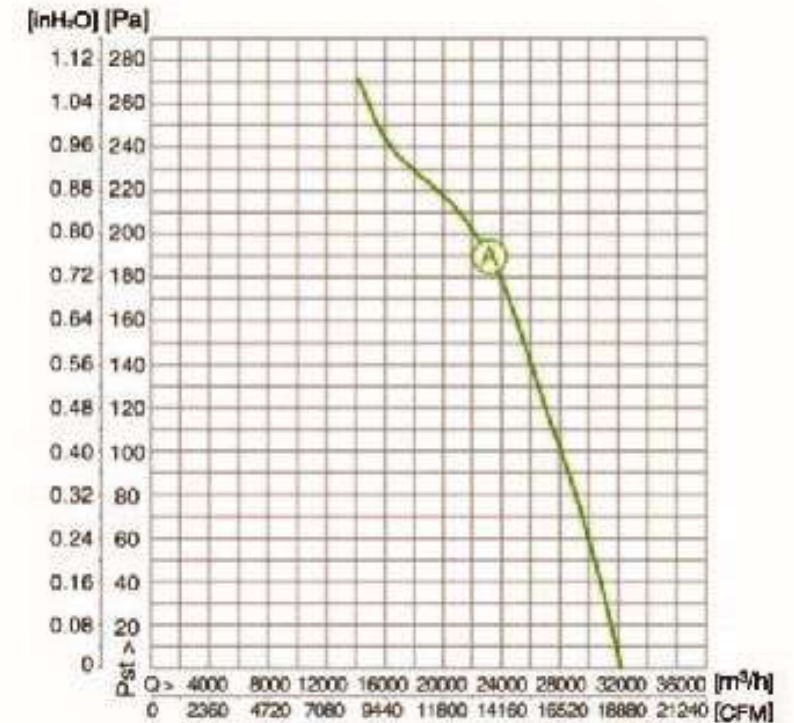
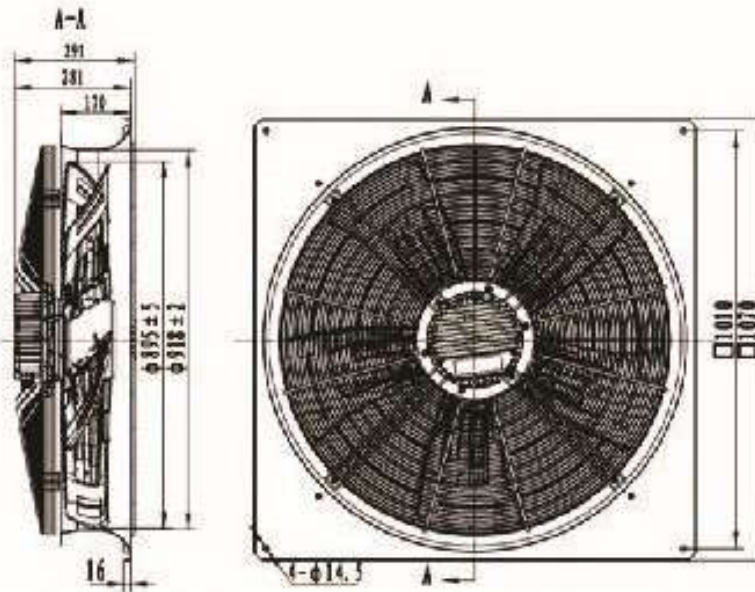


# EC AXIAL FAN

## Φ900

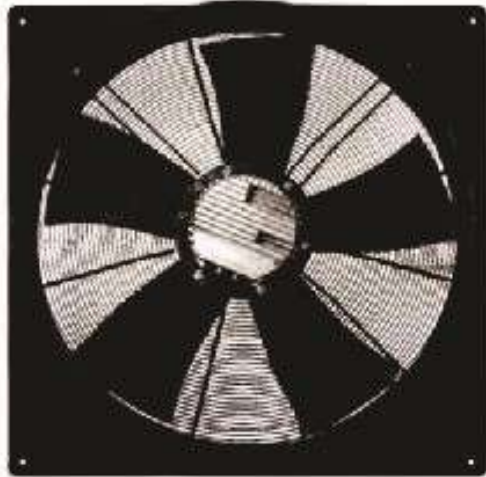

**Material :** Blade Plastic, Rotor : Coated in Black, Electronics enclosure Die-cast Aluminium

**Technical Features :** Control Input : 0-10 VDC/PWM: Control Input 4-20mA, BUS RS485; Speed Signal Feedback Dual auxiliary output power supply, 10V DC+- 10% max 10mA, 20VDC +/- 10% max 50mA

**Protection :** Current Limitation, Stall Protection, Soft Start Protection, Open Phase protection, Overheating Protection, Over/Under Voltage Protection.

**IP 54 Protection, Fan Blades : 5**

**Rotation Direction :** Clockwise, see on the Leads (Suction)

**Mounting Position :** Horizontal or Vertical

**Bearing :** Maintenance Free Ball Bearing

**Operation Mode :** S1

MODEL	VOLTAGE (V)	FREQUENCY (Hz)	AIR VOLUME (m <sup>3</sup> /h)	SPEED (r/min)	INPUT (W)	CURRENT (A)	NOISE (dB(A))	Approvals	Insulation	WIRING DIAGRAM	AMBIENT TEMPERATURE
PMSWF150L105-1010H-900 PA	3~400	50/60	32200 (A)	1000	1771	2.99	78	CQC, CE, UL	Class F	PG # 31	-25 ~ + 60 Deg. C