
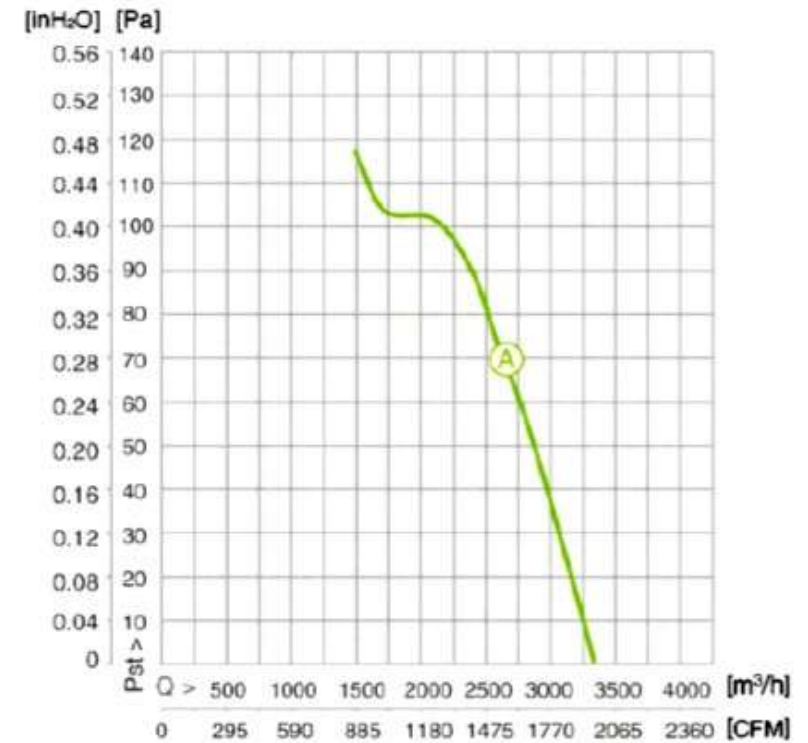


# EC AXIAL FAN Φ 350

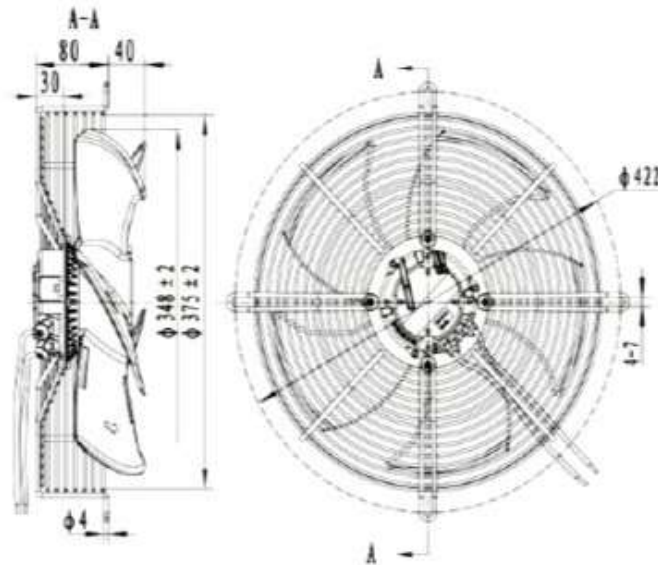

**Material :** Blade Plastic, Rotor : Coated in Black, Electronics enclosure Die-cast Aluminium

**Technical Features :** Control Input : 0-10 VDC/PWM: Control Input 4-20mA, Speed Signal Feedback Single auxiliary output power supply, 10V DC+/- 10% max 10mA

**Protection :** Current Limitation, Stall Protection, Soft Start Protection, Open Phase protection, Overheating Protection, Over/Under Voltage Protection.

**IP 54 Protection, Fan Blades : 5**

**Rotation Direction :** Clockwise, see on the Leads (Suction)

**Mounting Position :** Horizontal or Vertical

**Bearing :** Maintenance Free Ball Bearing

**Operation Mode :** S1

MODEL	VOLTAGE (V)	FREQUENCY (Hz)	AIR VOLUME (m³/h)	SPEED (r/min)	INPUT (W)	CURRENT (A)	NOISE (dB(A))	Approvals	Insulation	Wiring Diagram	Ambient Temperature
PMDWF74L25-422N-350 PA	1~ 230	50/60	3400	1700	139	1.04	62	CQC, CE, UL	Class F	PG # 27	-25 ~ +60 Deg. C