
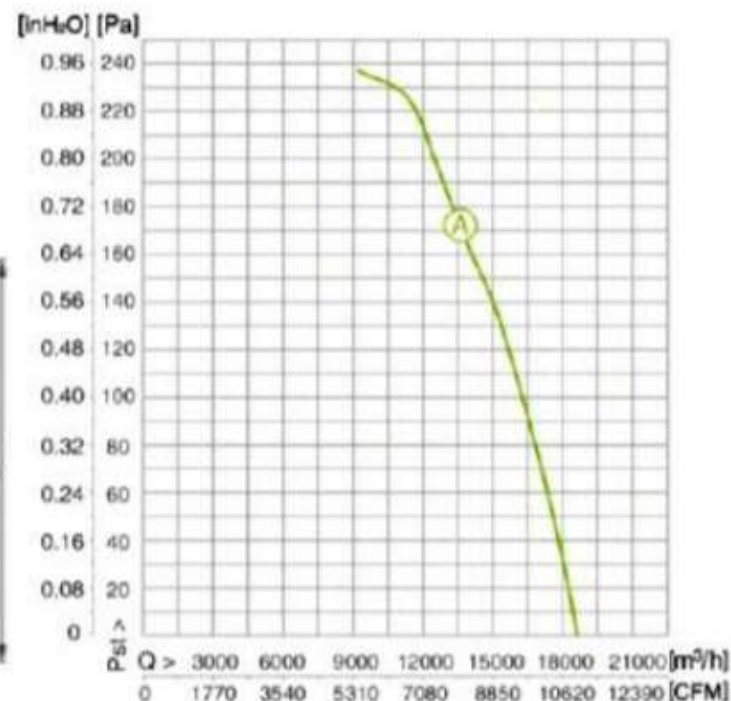


EC AXIAL FAN Φ710

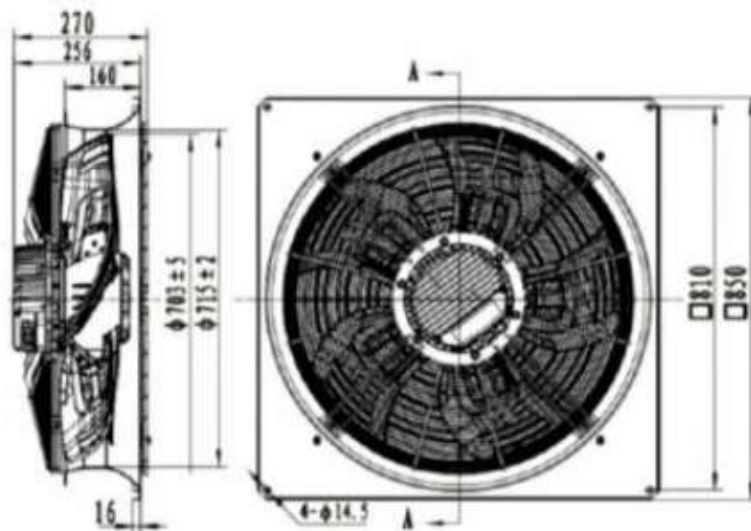

Material : Blade Plastic; GF or Aluminium Alloy, Rotor : Coated in Black, Electronics enclosure Die-cast Aluminium

Technical Features : Control Input : 0-10 VDC/PWM: Control Input 4-20mA, BUS RS485; Speed Signal Feedback Dual auxiliary output power supply, 10V DC+/- 10% max 10mA, 20VDC +/- 10% max 50mA

Protection : Current Limitation, Stall Protection, Soft Start Protection, Open Phase protection, Overheating Protection, Over/Under Voltage Protection.

IP 54 Protection, Fan Blades : 5

Rotation Direction : Clockwise, see on the Leads (Suction)

Mounting Position : Horizontal or Vertical

Bearing : Maintenance Free Ball Bearing

Operation Mode : S1

| MODEL | VOLTAGE (V) | FREQUENCY (Hz) | AIR VOLUME (m³/h) | SPEED (r/min) | INPUT (W) | CURRENT (A) | NOISE (dB(A)) | Approvals | Insulation | Wiring Diagram | Ambient Temperature |
|-------------------------|-------------|----------------|-------------------|---------------|-----------|-------------|---------------|-------------|------------|----------------|---------------------|
| PMSWF150L50-810H-710 PA | 3~ 400 | 50/60 | 18800 | 1200 | 1146 | 1.97 | 74 | CQC, CE, UL | Class F | PG # 31 | -25 ~ + 60 Deg. C |