DC Brushless Centrifugal Fans
直流无刷离心风机 Φ175-62

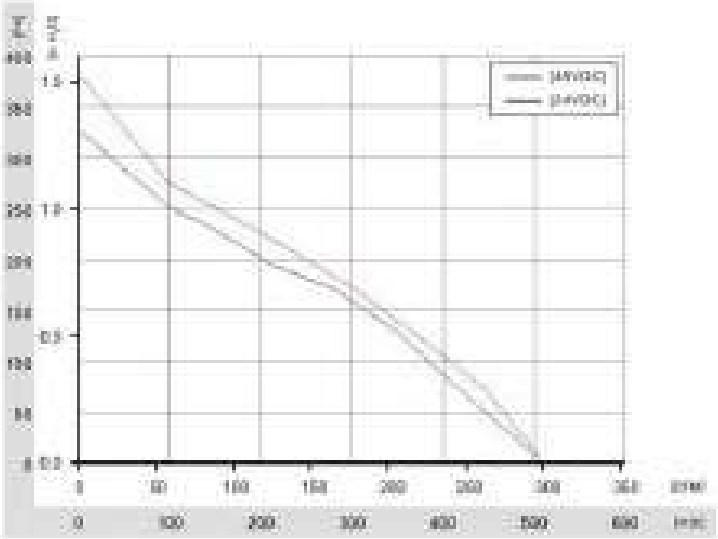

Material: Impeller completely made of plastic PA66
Technical features: Control input 0~10 VDC/PWM,
Motor protect: Tach output, locked-rotor protection, current limited, soft start
Bearing: Ball bearing
Motor insulation Class: F
Approvals: CCC、CE、UL、TUV

风轮采用PA66塑料制成
采用0~10VDC控制电压或脉冲宽调制
具有速度反馈输出、堵转、限流保护、软启动等功能
采用滚珠轴承
绝缘等级：F
产品符合的认证：CCC、CE、UL、TUV
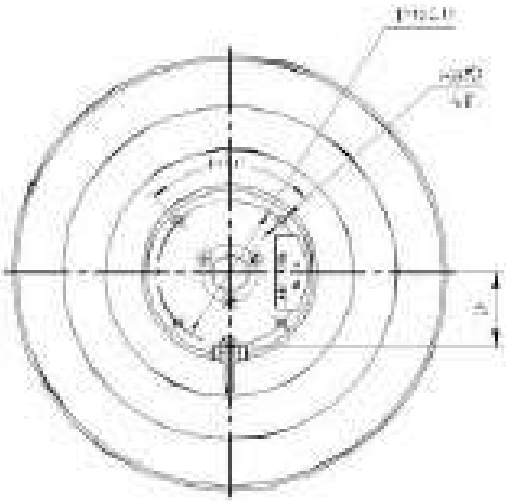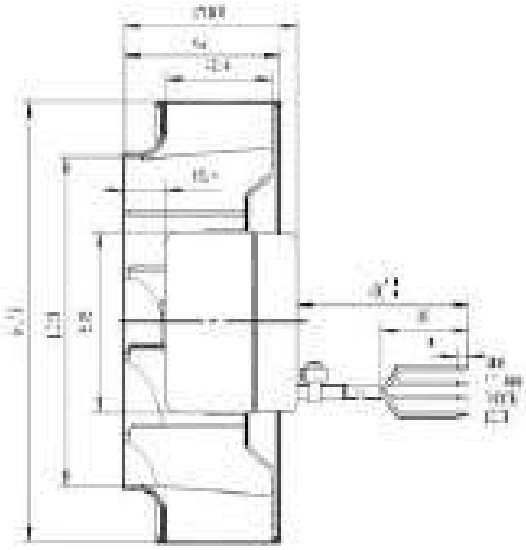
Type	Nominal Voltage (VDC)	Voltage Range (VDC)	Airflow (m^3/h)	Speed (rpm)	Power (W)	Noise (dB(A)	Current (A)	Amb. Temp (℃)
SC175D3-DC0	24	16~28	510	3000	31	68	1.3	-25~+60
SC175D3-DF0	48	36~57	510	3000	38	68	0.8	-25~+60