

COMMONWEALTH DC BRUSHLESS BLOWER

CIC-100


97x94x33mm

DESIGN FEATURES


- *BEARING SYSTEM: BALL BEARING & SLEEVE BEARING
- *IMPELLER: PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- *HOUSING: PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- *MOTOR: BRUSHLESS DC
- *CONNECTING: WIRE LEADS
- *AVAILABLE FG TYPE FOR SPEED SENSOR SIGNAL



DIMENSIONS:MM

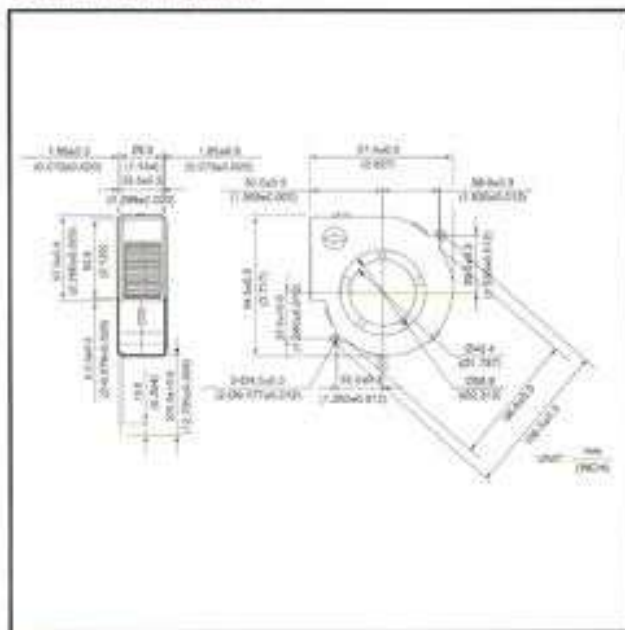

PERFORMANCE

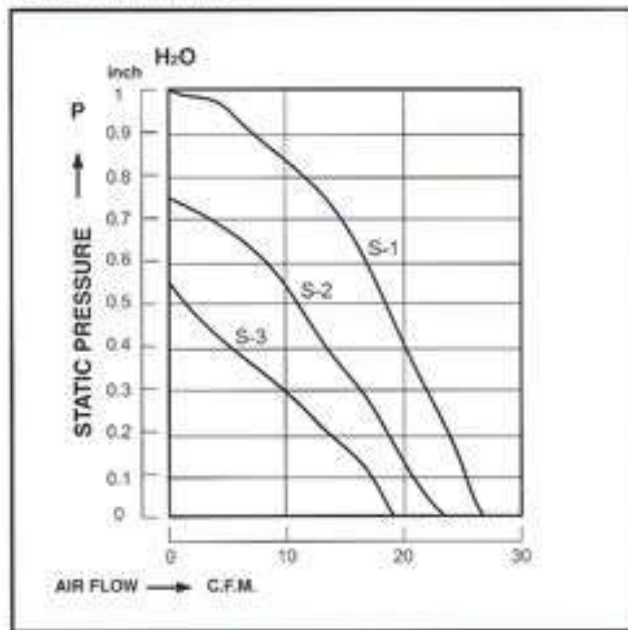

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
CIC-100	12	26	0.74	0.86	10.32	3600	1.00	51
(S-1)	24	26	0.74	0.60	14.40	3600	1.00	51
CIC-100	12	23	0.65	0.64	7.68	3200	0.75	48
(S-2)	24	23	0.65	0.40	9.60	3200	0.75	48
CIC-100	12	19	0.54	0.48	5.76	2600	0.52	44
(S-3)	24	19	0.54	0.15	3.60	2600	0.52	44