

# COMMONWEALTH DC BRUSHLESS FAN

## FP-108G/DC


40x40x20mm

### DESIGN FEATURES


- \*BEARING SYSTEM: SLEEVE BEARING & BALL BEARING
- \*IMPELLER: PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- \*HOUSING: PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- \*MOTOR: BRUSHLESS DC
- \*CONNECTING: WIRE LEADS
- \*SPEED: S-1 HIGH SPEED TYPE  
S-2 MEDIUM SPEED TYPE
- \*AVAILABLE FG TYPE FOR SPEED SENSOR SIGNAL



### DIMENSIONS:MM

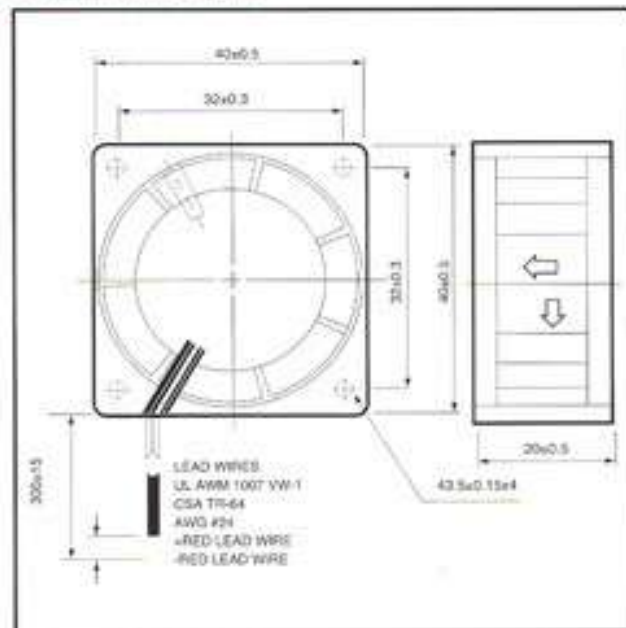

### PERFORMANCE

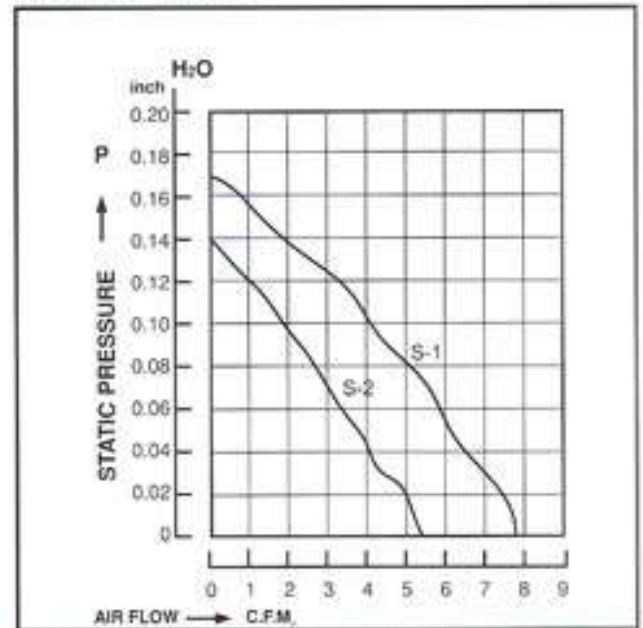

### SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M <sup>3</sup> /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H <sub>2</sub> O)	NOISE (dBA)
FP-108G/DC (S-1)	5	7.80	0.22	0.25	1.25	7000	0.17	31
	12	7.80	0.22	0.10	1.20	7000	0.17	31
	24	7.80	0.22	0.09	2.16	7000	0.17	31
FP-108G/DC (S-2)	5	5.40	0.15	0.12	0.60	5000	0.14	23
	12	5.40	0.15	0.09	1.08	5000	0.14	23
	24	5.40	0.15	0.07	1.68	5000	0.14	23